



Hazardous Locations Demand Superior Gas Detection!

Quasar 90 provides the most reliable gas detection in all weather conditions!

www.spectrex.net

The SafEye Quasar 900 Series is the very latest open path IR technology and detects a wide range of hydrocarbon gases – including alkanes (methane to hexane) and ethylene. Path lengths can be up to 660ft (200m). Quasar 900 models can be tailored to protect your high-risk installation. Reliability and performance is key and is assured with SIL2 approval and successful 3rd party FM performance / function testing to FM and EN standards

Why Open Path Gas Detectors?

Spectrex invented the xenon flash lamp design that revolutionized the open-path gas detection market, which, until then, was plagued by false alarms due to the drawbacks of the previous designs. Now, Open path detectors complement the use of individual point detectors, take executive action and offer many significant benefits including:


- Wider area coverage
- Most likely method to pick up any leak
- Very high speed of response
- No unrevealed failure modes
- Beam block warning
- Detector location is less critical
- Size of gas hazard indicated

From the
Arctic Circle to
Middle Eastern
Deserts


Applications include:

- Offshore platforms & FPSOs
- Petrochemical plants
- Chemical processing plants
- Gas filling and distribution terminals
- Gas transport and pipelines
- Large storage areas & buildings
- Perimeter monitoring

Gas leak can be picked up by Open Path Detectors that point detectors miss!

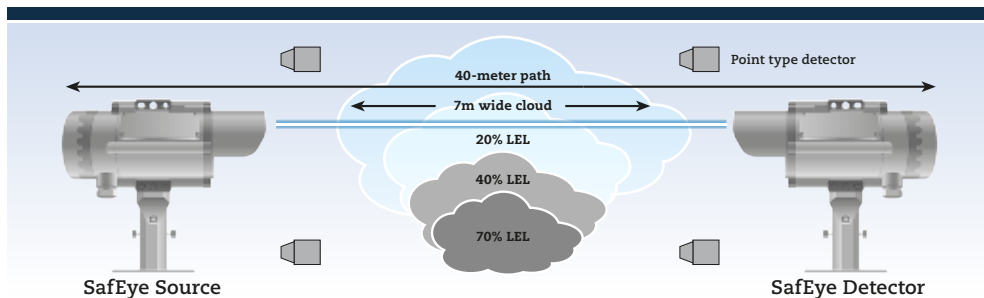

This scenario shows how the matrix of point type detectors can miss a leak or eventually only see diluted gas levels whereas SafEye 900 Open-Path will, in this case, measure 20% LEL x 7m = 1.4 LEL.m - well above 1 LEL.m alarm level

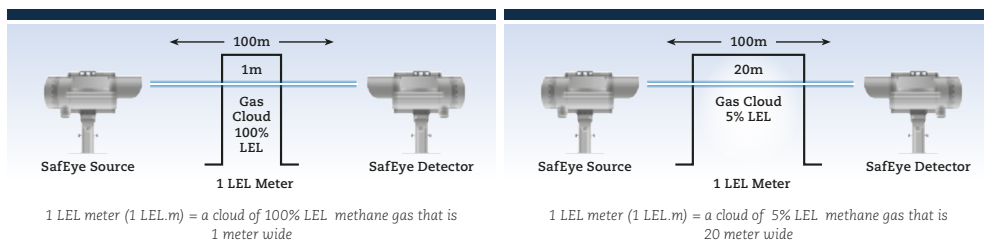



Don't just take our word for it!

We had Factory Mutual (FM) independently test Quasar 900 to recognized worldwide Function and Performance standards for open-path gas detectors (FM6325 and EN60079-29-4). Guess what – we passed with flying colors!

Why do we do this?

(apart from anything else, it costs a lot).
Well, its to give you the assurance that what we say about Quasar 900 is true – and in safety, that's important!

IMMUNITY TO FALSE ALARMS

Quasar 900 is totally immune to interference from sunlight or any other sources of radiation such as flare stacks, arc welding or lightning.

PERFORMANCE IN ALL WEATHERS

The Quasars 900's high power xenon lamp will compensate for changing weather conditions, including rain, fog, mist, snow and makes it immune to influences from solar radiation, arc-welding, stack flares or vibration from machinery.

The optical lenses are thermostatically heated to prevent the formation of ice and build up of snow on the optics even under severe weather conditions. It also eliminates build up of condensation on the lenses.

Quasar is rated for operation over a very wide temperature range from -67°F to + 149°F (-55°C to + 65°C) - a truly worldwide product

RELIABILITY

Quasar 900 is approved to SIL2 (IEC61508), equipped with heated optics and tolerates a very wide temperature range to provide reliable detection

FAILSAFE

No unrevealed failures. In normal operation, the output signal is 4 to 20 mA, depending on the measured gas concentration.

Sub-4mA signals includes indications for beam blockage (2mA), a fault (1mA). In addition, a continuous self-test of the Quasar 900 will issue a pre-warning signal (3mA) where the detector is still operational but requires some attention – for example when the transmitter or receiver is misaligned or if there is a deposit build-up on the optics. Maintenance without downtime!

BUILT-IN DATA LOGGER

An internal data-logger keeps a detailed record of the previous 100 events.

GAS LIBRARY

The detectors can be calibrated to methane, propane or ethylene. The calibration selection must be determined when ordering.

MINIMUM DETECTABLE LEVEL

Due to Quasar 900's inherent stability and sensitivity, the minimum detectable level is 0.15 LEL.m

SIMPLE TO ALIGN AND COMMISSION

One person can easily align and commission the system without the need for special training or skills. After an initial coarse adjustment by eye, a telescope is fitted allowing fine adjustment to optimized the adjustment for maximum signal strength.

Installation Options

QUASAR OFFERS OPTIONS FOR YOUR INSTALLATION:

- 0-20mA analog output with HART capability
- RS485 Modbus, where up to 256 detectors can be linked.

Worldwide Approvals

- **Hazardous area (Zone 1)**
FM/FMC, ATEX, IECEx, Inmetro, TR CU
- **Performance (3rd party):**
FM 6325 approved by FM EN60079-29-4 tested by FM
- **Reliability:**
SIL2 (TUV)


HART

HART capabilities within the Quasar 900 can provide digital communications between the field and the safe area. This can provide real time information on the status of an individual detector as well as configuration and historical data of each device, without the need for extra cable cores.

A key feature of HART is that digital signals are transmitted on the same two wires as the 0-20mA current signal.

Useful and useable information available via HART includes:

- Display set-up
- Reconfigure set-up – such as heater control, address
- Display detector status and definition
- Perform detector diagnostics
- Troubleshooting
- View Event Log

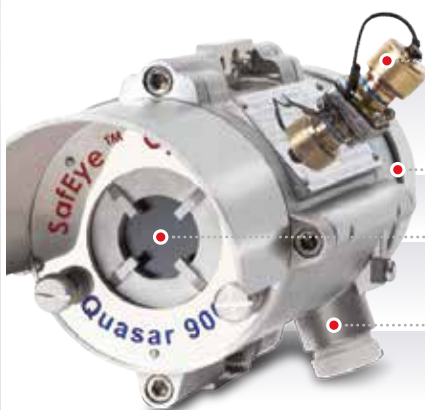

I.S. approved connection port for hand held terminal in field or safe area

316L Stainless Steel housing

Heated optics

Electrical entries (x2)
3/4" NPT or M25





Complete Access in the Field or Safe Area

The unique, intrinsically safe approved connection port on the Quasar 900 receiver allows simple connection of various types of handheld unit that will communicate with Quasar 900 in the hazardous area. These handheld devices allow user to check alignment, zero, perform configuration changes, view event log, perform diagnostic functions, in conjunction with Spectrex software.


The handheld units are robust weather-proof devices, certified intrinsically safe for use in a hazardous, classified area.

Two options are available, both able to connect to the intrinsically safe approved connection port on the Quasar 900 receiver.

- HART handheld
- RS485 handheld

For work in a safe area / workshop, other options are available, still connected via the I.S. port. for your convenience.

These take the form of cable harnesses to connect with your own PC/laptop, using free Spectrex software

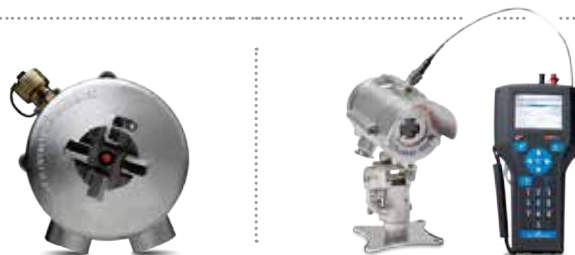

6 | SafEye Quasar 900 Series Open Path Gas Detector

GENERAL SPECIFICATIONS

Detection Range	Model	901	902	903	904
	Feet	23-66	50-132	115-330	265-660
	Meters	7-20	15-40	35-100	80-200
Detected Gas	C1-C8				
Response Time	3 sec.				
Immunity to False Alarm	Not influenced by solar radiation, hydrocarbon flames and other external IR radiation sources.				
Sensitivity Range	0-5 LEL.m methane and propane				
	0-8 LEL.m ethylene				
Spectral Response	2.0 - 3.0µm				
Displacement/Misalignment Tolerance	±0.5°				
Drift	±7.5% of the reading or ±4% of the full scale (whichever is greater)				
Minimum Detectable Level	0.15 LEL.m				
Temperature Range	-67°F (-55°C) to 149°F (65°C)				
Humidity	Up to 95% non-condensing (withstands up to 100% RH for short periods)				
Heated Optics	To eliminate condensation and icing on the window				
Warranty	Safety system – 3 years				

ELECTRICAL SPECIFICATIONS

Power Supply	24VDC nominal (18-32 VDC)		
Power Consumption	Detector: 250mA (300mA Peak)		
(peak includes heated optics)	Source: 250mA (300mA Peak)		
Warm Up Time	30 sec for transmitter and receiver		
Electrical Connection (specify)	2 x 3/4" – 14NPT conduits or 2 x M25 x 1.5mm ISO		
Electrical Input Protection	per MIL-STD-1275B		
Electromagnetic Compatibility	EMI/RFI protected per EN50270		

OUTPUTS – INTERFACES

0-20mA Current Output	Sink (source option) configuration - maximum load of 500 ohm at 18-32 VDC		
	Gas reading	4-20mA	Obscuration/beam block
	Normal, zero reading	4mA	Zero calibration mode
	Maintenance call	3mA	Fault
	Misalignment	2.5mA	0mA
RS-485 Interface – Modbus Compatible	The RS-485 input/output provides complete data information to a PC and receives control commands from the PC or handheld unit		
HART	HART communications on 0-20mA analog current (FSK) – used for maintenance and asset management		
Visual Status Indicator	3 color LED: Green – Power on, Yellow – Fault, Red – Alarm		

MECHANICAL SPECIFICATIONS

Hazardous Area Approval	ATEX&IECEX	Ex II 2(2)G D Ex db eb ib [ib Gb] IIB + H2 T4 Gb Ex tb IIIC T135°C Db Ta = -55°C to +65°C
	FM/FMC	Class I Div 1 Groups B, C and D Class II,III Div 1 Groups E, F and G
	TR CU/EAC	1Ex d e ib [ib Gb] IIB + H2 T4 Gb X Ex tb IIIC T135°C Db X
	Inmetro	Ex db eb ib [ib Gb] IIB_H2 T4 Gb Ex tb IIIC T135°C Db
Performance	Approved per FM6325 and tested by FM per EN60079-29-4	
Reliability	SIL2 per IEC61508 (TUV)	
Enclosure	The source and detector housings are stainless steel 316L with electro polish finish. The circuit boards are conformal coated and protected from mechanical vibrations. The tilt mount is also stainless steel 316L.	
Dimensions	Detector/Source	10.5 x 5.1 x 5.1 inch (267 x 130 x 130mm)
	Tilt Mount	4.7 x 4.7 x 5.5 inch (120 x 120 x 158mm)
Weight	Detector/Source	11lb (5kg)
	Tilt Mount	4.2lb (1.9kg)
Water and Dust Tight	IP66 and IP68 NEMA 250 6P	
Environmental	Meets MIL-STD-810C for Humidity, Salt and Fog, Vibration, Mechanical Shock, High and Low Temperature	

ACCESSORIES

Tilt Mount	P/N 888270	HART Hand-Held Diagnostic Unit	P/N 888810
Wall Mount	P/N 799255	HART Harness Kit	P/N 888815
U-Bolt/Pole Mount (4-5 inch)	P/N 799225	USB/RS485 Harness Converter Kit	P/N 794079
U-Bolt/Pole Mount (2-3 inch)	P/N 888140	Weather Cover	P/N 888263
Commissioning Kit	P/N 888247		

Accessories



COMMISSIONING KIT P/N 888247

The Commissioning/Alignment Kit is required for commissioning and maintenance checks. Only one kit is required per site, Includes: Alignment Telescope, Magnetic Mode Selector, Function Check Filters (2) and set of Socket keys for access to units



WEATHER COVER, STAINLESS STEEL P/N 888263

TILT MOUNT P/N 888270

POLE MOUNT (U-Bolt, 4-5 inch) P/N 799225



Duct Mount P/N 888355-2

The Duct Mount allows gas detection in areas where the monitored area does not allow installation of the gas detection system inside the area.

Communication, Diagnostics, Set-up

Commissioning, maintenance and diagnostics tools for the Quasar 900 Series, which provides verification, status and instructions for changing detector parameters.



HART HAND-HELD DIAGNOSTIC UNIT P/N 888810

Certified I.S. (EExia) for use in the hazardous area and connects to I.S. port on 900.

If, instead, user wishes to use their own HART handheld or PC / laptop in safe area, we offer:

HART HARNESS KIT P/N 888815

For standard HART Hand-Held (I.S.) to connect between the Hand-Held and the I.S. Port on 900, including a harness.

USB RS485 HARNESS CONVERTER KIT P/N 794079



With RS485/USB converter, kit is used with Spectrex Host software, enables the user to connect to any available PC or laptop. For use in safe area only. Connects, for convenience, to connection port on 900 or RS485 terminals

How to choose your new Quasar 900

Quasar 900 Part numbers

Model	=	Receiver	+	Transmitter	Installation Distance
901		QR-X-11X	+	QT-X-11X	23-66 ft / 7-20m
902		QR-X-11X	+	QT-X-21X	50-132 ft / 15-40m
903		QR-X-11X	+	QT-X-31X	115-330 ft / 35-100m
904		QR-X-11X	+	QT-X-41X	265-660 ft / 80-200m

Part no. code for specific requirements

 RECEIVER	QR	- X -	1	1	X
	C: ATEX F: FM B: Inmetro R: TR CU				1: M25 2: 3/4" NPT
 TRANSMITTER	QT	- X -	X	1	X
	C: ATEX F: FM B: Inmetro R: TR CU		1: 7-20m: Short Range 2: 15-40m: Medium Range 1 3: 35-100m: Medium Range 2 4: 80-200m: Long Range		1: M25 2: 3/4" NPT

System Part no. model definition

90X	- X -	X	X	X
1: 7-20m: (23-66ft) 2: 15-40m: (50-132ft) 3: 35-100m: (115-330ft) 4: 80-200m: (256-660ft)	C: ATEX F: FM B: Inmetro R: TR CU	1: M25 2: 3/4" NPT	O: No G: Yes	1: Methane 2: Propane 3: Ethylene



For more information view manual or website www.spectrex.net
 For all technical assistance or support, contact a Spectrex office or your local distributor listed online.
 Specifications subject to change



Headquarters: 6021 Innovation Blvd, Shakopee, MN 55379, USA
 Tel: 973 239-8398
 E-mail: spectrex.csc.rmtna@emerson.com | www.spectrex.net