




SafEye

300 SERIES GAS DETECTION SYSTEMS FOR

# AIR DUCT

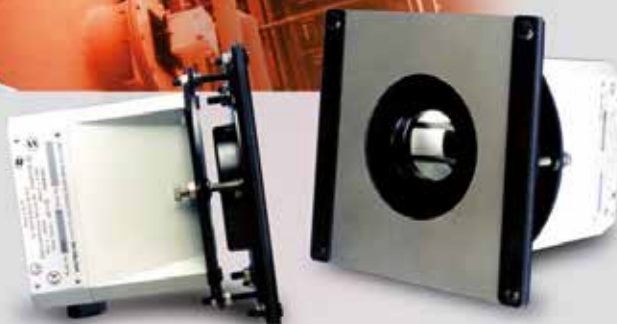

- **FASTER RESPONSE AND MORE RELIABLE RESULTS**

- **MORE EFFECTIVE AND MORE ECONOMICAL...**

Compared to 'Point' Type Detectors or 'Sample Draw' Systems!

**RELIABLE HIGH SPEED DETECTION**



## MAIN FEATURES



### HIGH SENSITIVITY

- Alarm up to 0.5 LEL.m
- 5 times more sensitive than the normal Open Path equipment

### FAST RESPONSE

- Fast response time of 2 seconds
- 5 to 10 times faster than the commonly used Open Path detector and 20-50 times faster than the Point Detector.

### LOW MAINTENANCE

High reliability, simple installation, alignment and maintenance, equipment not subject to poisoning.

### PROVEN TECHNOLOGY

Used in air ducts on FPSO's and offshore rigs for British Petroleum (BP), Shell and ABB Lummus for turbines, air intakes, etc.

### HARSH ENVIRONMENT

Specially designed to perform under extreme conditions such as high-speed airflows, high temperatures (up to 158°F (70°C)), humidity and corrosive gases, where point detectors may not be effective.

### STANDARD INTERFACE OPTIONS

Standard 4-20 mA outputs or RS-485 output to allow networking (up to 64 detectors) to a central monitoring/PC system.

This feature also enables easy maintenance, local and remote diagnostic tools.

SafEye 300 Duct Open Path Detectors were specially designed and are widely used to monitor and alarm against ingress of hazardous gas concentrations into air intakes of turbine engines and HVAC air ducts. Formation and migration of gas clouds and their possible penetration into safe places, control rooms, turbine engines, etc. is a substantial risk that needs to be addressed.

Users, designers and safety and operational engineers are increasingly required to provide for adequate and fast detection and alarm to protect these hazards.

For duct applications, over a small path across an air inlet, the system is designed to respond with a very high sensitivity, full scale of 1 LEL.m for 2-6.6 ft. (0.6-2 m) wide inlet and full scale of 2.5 LEL.m for 6.6-23 ft. (2-7 m) wide inlet.

The SafEye 300 Duct system, due to its special optics design, provides for a misalignment tolerance of 2° in all directions and is protected against false gas reading and alarms which are caused by partial obscuration and blocking, misalignment, vibration, flexing or tilts.

Each SafEye unit is factory calibrated in a temperature cycle run at the entire operating temperature range. The temperature compensating mechanism allows correct operation in changing and extreme temperatures while maintaining the system's accuracy. Its internal microprocessor will automatically compensate for low signals with its internal Automatic Gain Control (AGC).

The SafEye 300 Duct system can be factory calibrated to gas mixtures that are associated with offshore production and processing and onshore installations.



## GENERAL SPECIFICATIONS

<b>Detected Gases</b>	Simultaneous detection of C1-C8 flammable gases		
<b>Detection Range and Response Time</b>	Model	301	302
	Distance	2-11.5ft (0.6-3.5m)	9.9-49.5ft (3-15m)
	Response Time	2 sec.	5 sec.
<b>Immunity to False Alarm</b>	Not influenced by solar radiation, hydrocarbon flames, other external IR radiation sources, high airflows and high loaded streams		
<b>Spectral Response</b>	3.0-4.0 $\mu$ m		
<b>Sensitivity Range</b>	0-2.5 LEL.m Standard; 0-1 LEL.m by dip-switch setting		
<b>Misalignment Tolerance</b>	$\pm 2^\circ$		
<b>Drift</b>	Long-term $\pm 5\%$ of full scale		
<b>Temperature Range</b>	-40°F (-40°C) to 158°F (70°C)		

## ELECTRICAL SPECIFICATIONS

<b>Power Supply</b>	24 VDC (18-32 VDC)		
<b>Power Consumption</b>	Detector:	150mA @ 24 VDC (200 mA Peak)	
	Source:	100mA @ 24 VDC (220 mA Peak)	
<b>Electrical Connection</b>	2 x 3/4" - 14NPT conduits or 2 x M25 x 1.5 mm ISO		
<b>Electrical Input Protection</b>	According to MIL-STD-1275B		
<b>Electromagnetic Compatibility</b>	EMI/RFI protected CE Marked		

## OUTPUTS

<b>0-20mA</b> Sink (source option) configuration	Maximum load	600 $\Omega$ at 18-32V DC		
	4-20mA	Gas reading		
	4mA	Normal, zero reading		
	2mA	Obscuration/misalignment /beam block		
	1mA	Zero calibration mode		
	0mA	Fault		
<b>HART Protocol</b>	HART communications on the 0-20mA analog current (FSK) - used for maintenance, configuration changes and asset management			
<b>RS-485</b>	The RS-485 input/output provides complete data information to a PC and receives control commands from the PC or handheld unit			
<b>Relays</b>	Type	Normal Position	Maximum Ratings	
	Alarm	SPDT	NO, NC	2A at 30V DC
	Accessory	SPST	Open	5A at 30V DC
	Fault	SPST	Closed	5A at 30V DC

## MECHANICAL SPECIFICATIONS

<b>Dimensions</b>	5.2" (132mm) x 5.2" (132mm) x max. 4.7" (120mm)		
<b>Weight</b>	Al. Encl.	Detector: max 8.7 lb (3.7 kg)	Source: max 8.58 lb (3.9 kg)
	St. Encl.	Detector: max 13.4 lb (6.1 kg)	Source: max 13.84 lb (6.3 kg)
<b>Mechanical Design</b>	The standard detector housing is heavy-duty, copper-free (less than 1%) aluminum. The housing is finished in white epoxy enamel and is also available in 316 Stainless Steel		
<b>Environmental Standards</b>	Meets MIL-STD-810C for Humidity, Salt & Fog, Vibration, Mechanical shock, High Temp, Low Temp		
<b>Water and Dust Tight</b>	IP66 and 67 per EN60529 NEMA 250 6P		

## HAZARDOUS AREA APPROVALS

<b>FM</b>	Class I, Division 1, Groups B, C and D, Dust Ignition proof for Class II, Division 1, Groups E, F and G. Performance per Class no. 6325
-----------	--

Specifications subject to changes

## ACCESSORIES

The following optional accessories designed for the SafEye system are available.

### Duct Mounting

The duct mount interfaces between the detector and the duct surface.

The duct mount enables the detector's alignment up to 3° in all directions (P/N 794716).

**Commissioning / Alignment Kit** for standard and duct type units is required for commissioning and future maintenance checks. Only one kit is required per site.

The kit includes an Alignment Telescope P/N 794110, a Magnetic Mode Selector P/N 790285 and a Function Check Filter P/N 794220-1÷5 for system testing along with socket keys for access to units (P/N 792247).



*Air Duct Installation on ETAP Platform in the North Sea*

## TYPICAL APPLICATIONS

Offshore Oil & Gas Rigs and FPSOs; Onshore Oil & Gas Terminals; Storage Farms and Filling Stations; Petrochemical and Chemical Industries; Power Utilities and Turbines areas; Automotive, Painting, Printing, Pharmaceutical Industries and many more.

Specific applications include:

- HVAC ducts (Heating Ventilation Air Conditioning) in accommodations areas
- Air ducts in process areas
- Stacks and exhaust towers
- Compressors and generators enclosures
- Curing ovens and drying equipment, printing equipment
- Engine & Turbine air intake and exhaust
- Air intake to safety enclosures
- Paint-booths and paint production and drying processes
- Air ventilation shafts



### HEADQUARTERS

8200 Market Boulevard,  
Chanhassen, MN 55317, USA  
Tel: +1 (973) 239-8398  
Fax: +1 (973) 239-7614  
www.spectrex.net  
spectrex@spectrex.net

### TEXAS (USA)

**Mr. Jay Cooley,**  
*Regional Sales Manager*  
16203 Park Row, Suite 150 Huston,  
Texas 77084, USA  
Tel: +1 (832) 321-5229  
jay.cooley@emerson.com

### FAR EAST

**Mr. Deryk Walker,**  
*Regional Sales Manager*  
59 Fen Ji Hu, Danshui  
Taipei Country 25163, Taiwan (ROC)  
Tel: +886 2 8626-2893, Cel: +886 926 664-232  
deryk.walker@emerson.com

Represented by: